



الزمن: ساعة ونصف

منسق المادة: أ. أيمن الترهوني

الفصل الدراسي: ربيع 2019

Answer all the following questions

Q1. (8 marks) Write a MATLAB Code to solve:

(i) The following system of equations:

$$2x - 4x^4 = 2$$

(ii) The inverse-Laplace transform of:

$$\frac{1}{s+a} + \frac{1}{s^2}$$

(iii) $\int_0^2 \sqrt{3} x^3 dx$

Q2. (8 marks) Looking to the given MATLAB code:

```
b=2.4; c=[linspace(0.5,1.5,2); ceil(2.1) round(3.4)];  
A= [prod([floor(b) max([1 0 0; 0 2 0; 0 0 3])])]  
B=[[sum(c*inv(c))]' rot90(reshape(transpose([2 6]),1,2))]
```

What are the expected results of the A and B?

Q3. (8 marks) Given the following MATLAB code:

(i) What is the expected result of C when the design reference is entered 1 and b = 1.


(ii) What will be displaying on the screen when the design reference is 2 and your Q.M is 25.

(iii) What will be displaying on the screen when the design reference is entered 5.

```
d = input('design reference')  
switch d  
    case 1;  
        a=9;  
        b=input('b')  
  
    while b<=a+1  
        c=2*a+sqrt(a)  
        b=b+a^2+2;  
        a=a^2;  
    end  
    case 2;  
        q=input('your Q.M')  
        if q<50  
            disp('F')  
        elseif q>=50 && q<100  
            disp('P')  
        else  
            disp('W.I')  
        end  
    otherwise  
  
        disp('u r a star')  
  
end
```

أنظر خلف الورقة

Q4. (8 marks) Represent the following Simulink model as A Mathematical expression.

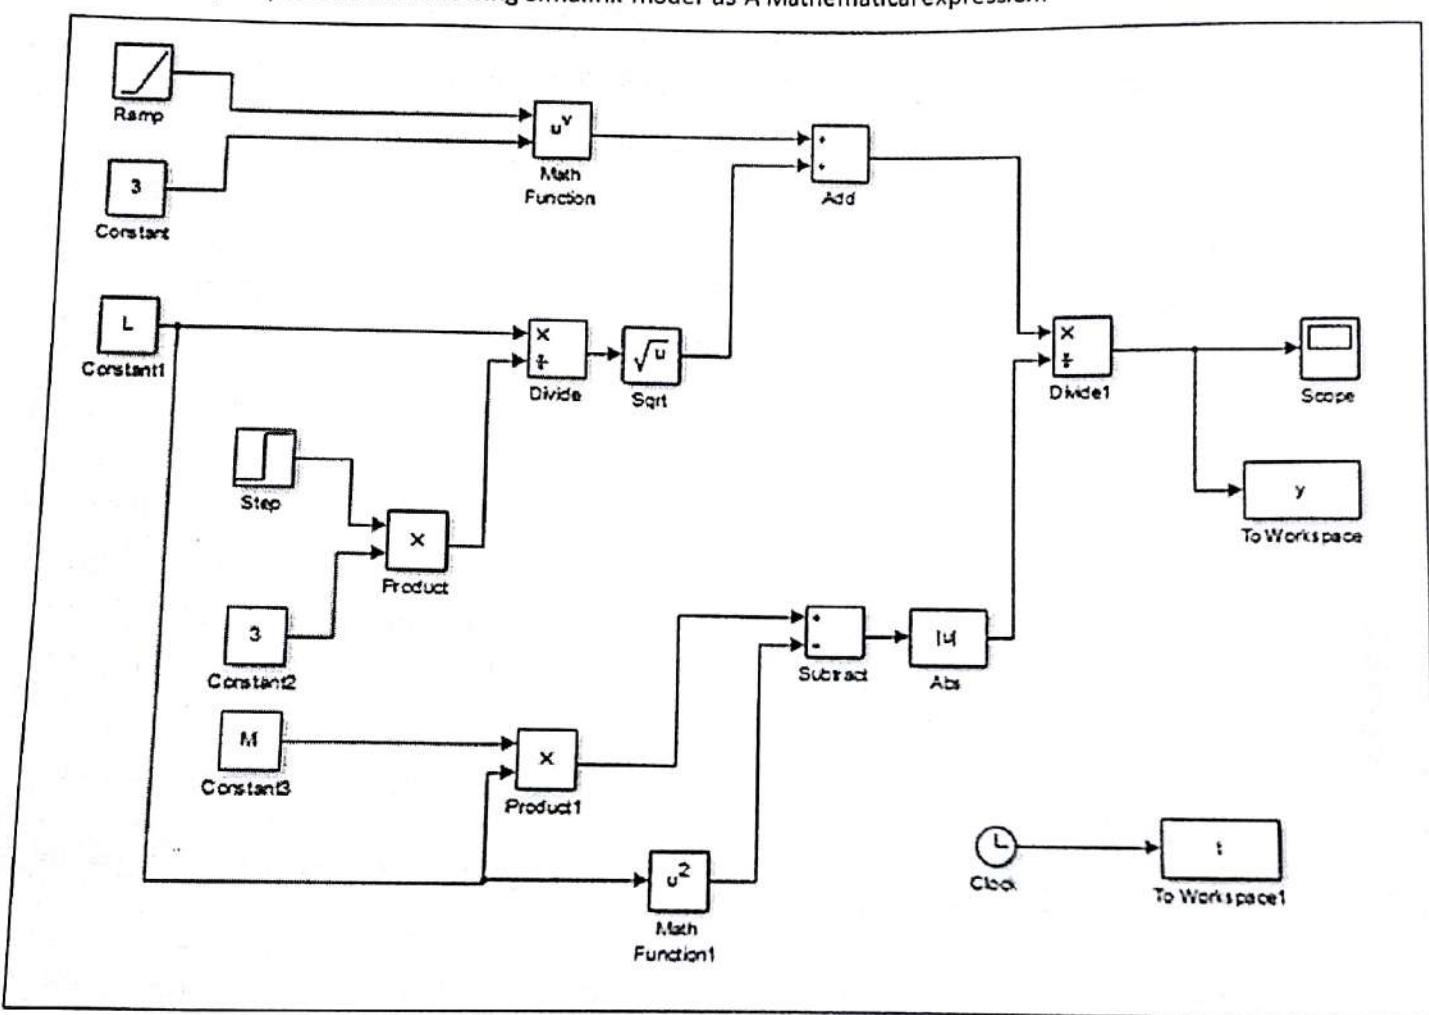

Q5. (8 marks) Given the following signals:

$$X_1 = 1.5 \cos\left(\frac{1}{4}t + \frac{\pi}{2}\right)$$

$$X_2 = 3 \cos\left(\frac{1}{100}\pi t\right)$$

$$X_3 = X_1 + X_2$$

Where, $t = 0, 0.25, 0.5, \dots, 100$

Write a MATLAB Code to plot the signals as shown in Fig.1

Fig.1

